


Yoke Offshore Container Shackle

pic_IGLAND

QR Code

Technical data

Item no.	Code	WLL	Dim mm							KG	
			B	D	W	A	E	G	H	N.W.	
		ton									
0219104	1/2"	2,00	13	16	20	47	33	30	85	0,4	
0219105	5/8"	3,25	16	19	27	61	43	38	106	0,7	
0219106	3/4"	4,75	19	22	33	72	50	46	126	1,0	
0219107	7/8"	6,50	22	26	38	86	58	53	148	1,7	
0219108	1"	8,50	26	28	44	96	68	61	166	2,4	
0219109	1 1/8"	9,50	28	32	46	111	74	68	190	3,4	
0219110	1 1/4"	12,00	32	36	54	121	84	76	210	4,8	
0219111	1 3/8"	13,50	36	38	59	134	92	84	232	6,5	
0219112	1 1/2"	17,00	38	44	60	146	99	92	254	8,8	
0219113	1 3/4"	25,00	47	51	73	178	127	106	313	17,5	
0219114	2"	35,00	53	57	83	197	146	122	347	24,2	

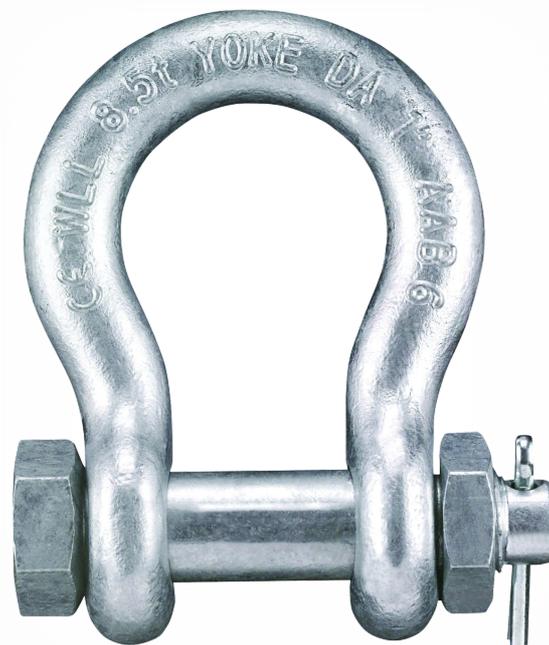

Yoke Offshore Container Shackle

logo

Product description

- Forged alloy steel, quenched and tempered.
- Tested and manufactured in accordance with DNV 2.7-1, DNV GL-ST-0378, EN 13889, ASME B30.26, U.S. Fed. Spec. RR-C-271F Type IVA, Grade A, Class 3.
- Certified by DNV 2.7-1.
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit (WLL).
- Charpy tested in accordance with DNV 2.7-1.
- Hot dip galvanized.
- Charpy test of 42 joules (31ft. lbs.) at -40°C (-40°F) for normal section.